


**BESTANG**

Global Sales Division (Qingdao)

Add: No.45 Beijing Road, Free Trade Zone,  
Qingdao, Shandong, China

E-mail: [info@bestangtyre.com](mailto:info@bestangtyre.com)

[www.bestangtyre.com](http://www.bestangtyre.com)



Instagram



Facebook

**BESTANG**



**TBR Catalogue**

Efficient Transport

2025





# Our Brand

## Driving A Better Life With Technology

Born for those who pursue high-quality driving experience, BESTANG focuses on providing safer, more efficient and reliable tyres and services, and reshaping the product characteristics of all-steel radial tyres.

BESTANG integrates cutting-edge innovative technologies and writes a blueprint of “Driving A Better Life With Technology” for all users. Besides, BESTANG has established a global export network that sells tyres to five continents. Near and far, we always deliver excellent products and services.



Better Safety




More Efficient



Higher Reliability


# Core Technology

The TFCT Technology based on the Theory of Variable Constraint Equilibrium Contour improves the wear resistance and uneven wear.

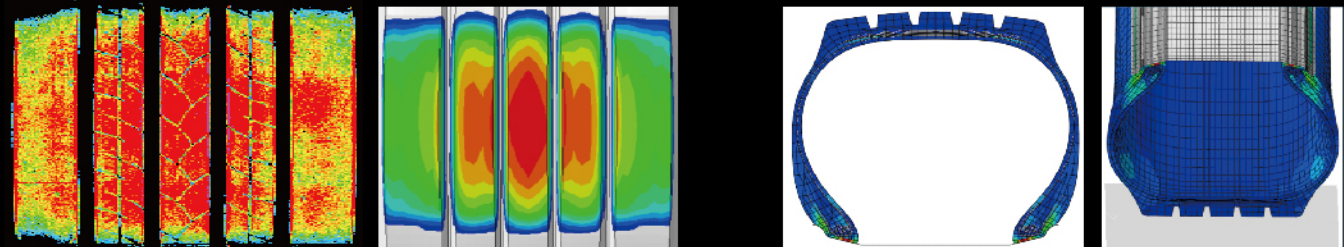


# High-wear-resistant formula technology

Carbon Nanotube Technology —— high wear resistance compound improves the wear resistance, tensile and tear strength properties

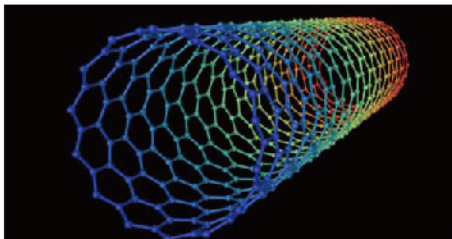

Carbon Nanotube Compound Structure

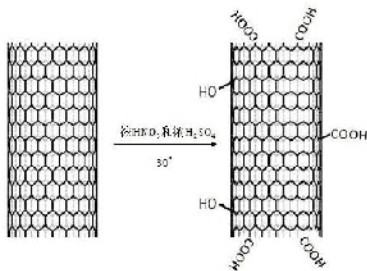

Carbon Nanotube Modification Technology






# Safety

## Low-Deformation Vacuum Tire Toe Reinforcement Structure Technology


Low-deformation vacuum tire toe reinforcement structure design — optimizes the material distribution in the bead, reduces the stress and strain strength of the entire bead, improves the tire's load-bearing capacity and achieves better safety and durability.

## 3rd Generation Tire Toe Design Structure

Tyre strain is significantly reduced and the bead durability is improved.

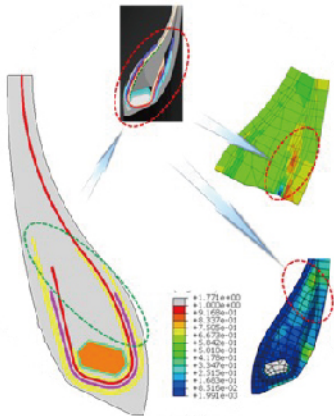

Ultra High Load



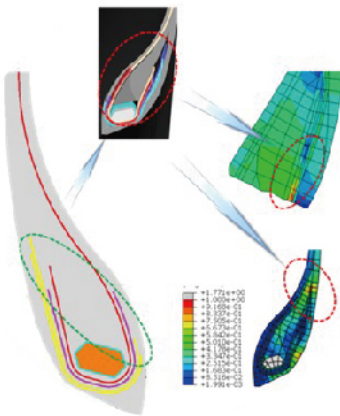


Heavy Load


## Heavy-Duty Structure and High-Strength Steel Wire Technology

Total high-strength steel wire structural materials are used to ensure the load and safety performance under ultra-high load.

Better carcass rigidity increases the overall rigidity of the tire, reduces the degree of deformation in heavy load and achieves better durable performance.

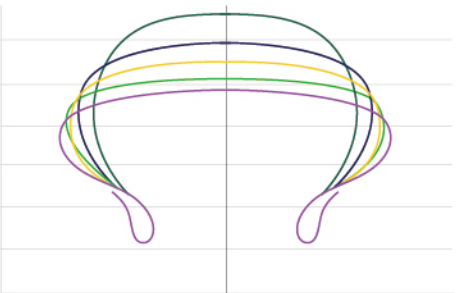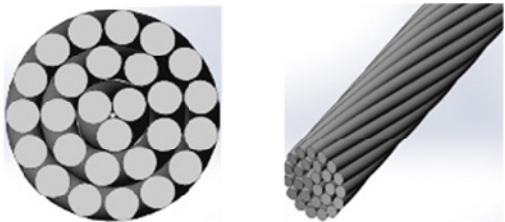

Improved Fatigue Life



Wheel Position Map

|                                                                                     |              |         |          |         |         |         |         |         |       |
|-------------------------------------------------------------------------------------|--------------|---------|----------|---------|---------|---------|---------|---------|-------|
|    | Drive        |         |          |         |         |         |         |         | 01-18 |
|    | BST 98D      | BST 97D | BST 88D  | BST 87D | BST 86D | BST 85D | BST 78D | BST 77D |       |
|    | BST 76D      | BST 75D | BST 74D  | BST 58D | BST 57D | BST 37D |         |         |       |
|                                                                                     |              |         |          |         |         |         |         |         |       |
|    | Front        |         |          |         |         |         |         |         | 19-33 |
|    | BST 39F      | BST 37F | BST 38F  | BST 36F | BST 35F | BST 33F | BST 34F | BST 31F |       |
|                                                                                     | BST 388F     | BST 32F | BST 387F |         |         |         |         |         |       |
|                                                                                     |              |         |          |         |         |         |         |         |       |
|    | All Position |         |          |         |         |         |         |         | 35-48 |
|    | BST 78A      | BST 77A | BST 76A  | BST 68A | BST 66A | BST 67A | BST 65A | BST 64A |       |
|                                                                                     | BST 63A      | BST 62A |          |         |         |         |         |         |       |
|                                                                                     |              |         |          |         |         |         |         |         |       |
|  | Trailer      | BST 38T | BST 37T  |         |         |         |         |         | 49-50 |
|                                                                                     |              |         |          |         |         |         |         |         |       |
|  | Winter       | BST 18A |          |         |         |         |         |         | 51    |

How Do You Read Tyre Pattern?

Brand + Pattern Serial No. + Position

|               |                                        |                    |                  |
|---------------|----------------------------------------|--------------------|------------------|
| BST (BESTANG) | Pattern Types                          | Pattern Serial No. | F (Front)        |
|               | 9 : Mining Roads                       | 8                  | D (Drive)        |
|               | 8 : Mixed Roads                        | 7                  | A (All position) |
|               | 7 : Regional Haul                      | 6                  | T (Trailer)      |
|               | 6 : Long Haul- All Positions           | 5                  |                  |
|               | 5 : Long Haul- Drive Position          | 3                  |                  |
|               | 3 : Long Haul- Front&Trailer Positions | 2                  |                  |
|               | 2 : Urban Bus                          | 1                  |                  |
|               | 1 : Off-road & Snowy Roads             | 9                  |                  |





# BST 98D



- Mainly for drive axle, also applicable for steer wheel
- Special pattern design, only applicable to driving on mining and bad roads with low speed
- Excellent grip and ride ability performance
- The pattern is good in self-cleaning, superior for wear and puncture resistance

| Size     | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|          |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 10.00R20 | 16PR | 278                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | F            | 7.5          | 21               |
| 10.00R20 | 18PR | 278                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | F            | 7.5          | 21               |
| 10.00R20 | 18PR | 278                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | K            | 7.5          | 21               |
| 11.00R20 | 16PR | 293                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | F            | 8.0          | 22               |
| 11.00R20 | 18PR | 293                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | F            | 8.0          | 22               |
| 12.00R20 | 18PR | 315                              | 1125             | 154/151    | 3750/3450     | 830/830     |                  | F            | 8.5          | 22               |
| 12.00R20 | 20PR | 315                              | 1125             | 156/153    | 4000/3650     | 900/900     |                  | F            | 8.5          | 22               |



# BST 97D



- Mainly for drive axle on mining and bad roads with low speed
- Excellent traction with big block pattern design
- Special compound supply anti crack and anti puncture performance
- Good performance on carrying capacity

| Size     | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|          |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 9.00R20  | 16PR | 259                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | F            | 7.5          | 21               |
| 9.00R20  | 16PR | 259                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | F            | 7.5          | 21               |
| 10.00R20 | 16PR | 278                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | K            | 7.5          | 21               |
| 10.00R20 | 18PR | 278                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | F            | 8.0          | 22               |
| 11.00R20 | 16PR | 293                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | F            | 8.0          | 22               |
| 11.00R20 | 18PR | 293                              | 1125             | 154/151    | 3750/3450     | 830/830     |                  | F            | 8.5          | 22               |
| 12.00R20 | 20PR | 315                              | 1125             | 156/153    | 4000/3650     | 900/900     |                  | F            | 8.5          | 22               |





# BST 88D



- Aggressive lug tread for powerful grip on or off the road
- Deep original tread for long life and outstanding traction
- Special tread compounds help resist cuts, chips, tearing and irregular wear

| Size     | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|          |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11.00R20 | 18PR | 293                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | J            | 8.0          | 20               |
| 12.00R20 | 20PR | 315                              | 1125             | 156/153    | 4000/3650     | 900/900     |                  | J            | 8.5          | 20.5             |
| 12R22.5  | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | K            | 9.00         | 20               |
| 12R22.5  | 20PR | 320                              | 1124             | 156/153    | 4000/3650     | 930/930     |                  | K            | 9.75         | 20               |
| 13R22.5  | 20PR | 320                              | 1124             | 156/153    | 4000/3650     | 930/930     |                  | K            | 9.75         | 20.5             |



# BST 87D



- Drive wheel application
- Mainly for regional and medium haul on mixed road condition
- Directed and mixed pattern with strengthening rib for good drive and brake performance
- Deep tread to extend tire service life
- Improved carcass in structure design for good carrying capacity

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 10.00R20  | 18PR | 278                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | K            | 7.5          | 19               |
| 12.00R24  | 18PR | 315                              | 1226             | 158/155    | 4250/3875     | 830/830     |                  | J            | 8.5          | 19               |
| 12.00R24  | 20PR | 315                              | 1226             | 160/157    | 4500/4125     | 900/900     |                  | K            | 8.5          | 19               |
| 325/95R24 | 22PR | 325                              | 1228             | 162/160    | 4750/4500     | 850/850     |                  | K            | 9.0          | 19.5             |



# BST 86D



- Mainly for drive axle on mix and bad road , such as construction road
- With good grip performance

| Size     | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|          |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 9.00R20  | 14PR | 259                              | 1019             | 141/139    | 2575/2430     | 790/790     |                  | K            | 7.0          | 17.5             |
| 9.00R20  | 16PR | 259                              | 1019             | 144/142    | 2800/2650     | 900/900     |                  | K            | 7.0          | 17.5             |
| 10.00R20 | 16PR | 278                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | G            | 7.5          | 19.5             |
| 10.00R20 | 18PR | 278                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | G            | 7.5          | 19.5             |
| 11.00R20 | 16PR | 293                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | F            | 8.0          | 22               |
| 11.00R20 | 18PR | 293                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | F            | 8.0          | 22               |
| 12.00R20 | 18PR | 315                              | 1125             | 154/151    | 3750/3450     | 830/830     |                  | F            | 8.5          | 22               |
| 12.00R20 | 20PR | 315                              | 1125             | 156/153    | 4000/3650     | 900/900     |                  | F            | 8.5          | 22               |
| 11R22.5  | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | G            | 8.25         | 24.5             |
| 11R22.5  | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | G            | 8.25         | 24.5             |
| 11R24.5  | 14PR | 279                              | 1104             | 146/143    | 3000/2725     | 720/720     |                  | G            | 8.25         | 24.5             |
| 11R24.5  | 16PR | 279                              | 1104             | 149/146    | 3250/3000     | 830/830     |                  | G            | 8.25         | 24.5             |
| 12R22.5  | 18PR | 320                              | 1124             | 154/151    | 3750/3450     | 830/830     |                  | F            | 9.75         |                  |
| 12R22.5  | 18PR | 320                              | 1124             | 156/150    | 4000/3350     | 875/875     |                  | G            | 9.75         |                  |
| 12R22.5  | 18PR | 320                              | 1124             | 156/150    | 4000/3350     | 875/875     |                  | K            | 9.75         |                  |



# BST 85D




- Mainly for short distance transportation
- On-off highway application
- High tread depth to provide long original tread life
- Open shoulder helps to provide good traction performance and self-cleaning capacity

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 7.50R16LT | 12PR | 215                              | 805              | 120/116    | 1400/1250     | 670/670     |                  | L            | 6.00G        | 13.5             |
| 7.50R16LT | 14PR | 215                              | 805              | 122/118    | 1500/1320     | 770/770     |                  | L            | 6.00G        | 13.5             |
| 7.50R16LT | 16PR | 215                              | 805              | 124/120    | 1600/1405     | 800/800     |                  | L            | 6.00G        | 13.5             |
| 8.25R16LT | 14PR | 235                              | 855              | 126/122    | 1700/1500     | 670/670     |                  | L            | 6.50H        | 15               |
| 8.25R16LT | 16PR | 235                              | 855              | 128/124    | 1800/1600     | 770/770     |                  | K            | 6.50H        | 15               |
| 9.00R20   | 14PR | 259                              | 1019             | 141/139    | 2575/2430     | 790/790     |                  | K            | 7.0          | 17               |
| 9.00R20   | 16PR | 259                              | 1019             | 144/142    | 2800/2650     | 900/900     |                  | K            | 7.0          | 17               |
| 10.00R20  | 16PR | 278                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | K            | 7.5          | 18               |
| 10.00R20  | 18PR | 278                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | K            | 7.5          | 18               |







Features




Ultra-wide tread offers large contact patch for longer wear resistance and service life.



Wide tread with four zigzag grooves improves mileage on all road conditions and ensures excellent drivability.



Special tread pattern designed with multi-purpose sipe provides excellent traction while reducing rolling resistance.



Shoulder pattern and block ribs with optimized shoulder materials prevent uneven wear and ensure higher wear performance.



**BST 78D**



Drive position for regional haul on national, provincial and mixed roads.




Wear Resistance




Strong Traction



Anti-uneven Wear



Four-ply belt structure increases the rigidity of the crown part and offers better high-speed driving performance



Carbon nanotube rubber material and compound technology are used to improve the performance of longer service life and high wear resistance.

**BST 78D**

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 315/80R22.5 | 20PR | 318                              | 1082             | 157/154    | 4125/3750     | 900         |                  | J            | 9.00         | 20               |



# BST 77D



- Mainly for drive and trailer axle
- On-off highway application
- Excellent traction and brake performance
- Good carrying capacity and low heating up

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 325/95R24 | 22PR | 325                              | 1228             | 162/160    | 4750/4500     | 850/850     |                  | K            | 9.0          | 19.5             |
| 12.00R24  | 20PR | 315                              | 1126             | 160/157    | 4500/4125     | 900/900     |                  | K            | 8.5          | 19               |



# BST 76D



- Aggressive, open-shoulder design helps deliver
- Long tread life and traction
- Mainly for drive wheel
- Extensive block siping improves traction by slicing through water for a solid grip on wet roads.
- Light On/Off-Highway Service / Regional Haul Service
- Pickup & Delivery Service Long Haul Service / Regional Haul Service

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11R22.5     | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 20               |
| 11R22.5     | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | M            | 8.25         | 20               |
| 11R22.5     | 16PR | 279                              | 1050             | 148/145    | 3150/2900     | 850/850     |                  | M            | 8.25         | 20               |
| 11R24.5     | 14PR | 279                              | 1104             | 146/143    | 3000/2725     | 720/720     |                  | M            | 8.25         | 20               |
| 11R24.5     | 16PR | 279                              | 1104             | 149/146    | 3250/3000     | 830/830     |                  | L            | 8.25         | 20               |
| 285/75R24.5 | 14PR | 283                              | 1050             | 144/141    | 2800/2575     | 760/760     |                  | M            | 8.25         | 24               |
| 285/75R24.5 | 16PR | 283                              | 1050             | 147/144    | 3075/2800     | 830/830     |                  | L            | 8.25         | 24               |
| 295/75R22.5 | 14PR | 298                              | 1014             | 144/141    | 2800/2575     | 760/760     |                  | M            | 9.00         | 24               |





# BST 75D



- Applicable for drive axle
- Riding on normal and paved road conditions
- With good grip and traction performance
- Good wear resistance and long mileage, excellent high speed performance

| Size    | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|---------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|         |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 12R22.5 | 14PR | 300                              | 1085             | 146/143    | 3000/2725     | 720/720     |                  | M            | 9.00         | 18.3             |
| 12R22.5 | 16PR | 300                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | L            | 9.00         | 18.3             |
| 12R22.5 | 16PR | 300                              | 1084             | 152/148    | 3550/3150     | 850/850     |                  | M            | 9.00         | 18.3             |
| 12R22.5 | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 18.3             |
| 12R22.5 | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 18.3             |



# BST 74D




- Close shoulder design
- Mainly for drive wheel
- Fuel saving for low rolling resistance
- Excellent water drainage
- Excellent grip and traction performance

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11R22.5     | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 20               |
| 11R22.5     | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | M            | 8.25         | 20               |
| 11R22.5     | 16PR | 279                              | 1050             | 148/145    | 3150/2900     | 850/850     |                  | M            | 8.25         | 20               |
| 11R24.5     | 14PR | 279                              | 1104             | 146/143    | 3000/2725     | 720/720     |                  | M            | 8.25         | 20               |
| 11R24.5     | 16PR | 279                              | 1104             | 149/146    | 3250/3000     | 830/830     |                  | L            | 8.25         | 20               |
| 285/75R24.5 | 14PR | 283                              | 1050             | 144/141    | 2800/2575     | 760/760     |                  | M            | 8.25         | 24               |
| 285/75R24.5 | 16PR | 283                              | 1050             | 147/144    | 3075/2800     | 830/830     |                  | L            | 8.25         | 24               |
| 295/75R22.5 | 14PR | 298                              | 1014             | 144/141    | 2800/2575     | 760/760     |                  | M            | 9.00         | 24               |
| 295/80R22.5 | 16PR | 298                              | 1044             | 150/147    | 3350/3075     | 830/830     |                  | L            | 9.00         | 21               |
| 295/80R22.5 | 18PR | 298                              | 1044             | 152/149    | 3550/3250     | 900/900     |                  | M            | 9.00         | 21               |
| 315/80R22.5 | 18PR | 312                              | 1076             | 154/151    | 3750/3450     | 830/830     |                  | M            | 9.00         | 21               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 157/154    | 4125/3750     | 900/900     |                  | K            | 9.00         | 21               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850     |                  | L            | 9.00         | 21               |




**Features**




Ultra-wide tread offers large contact patch for longer wear resistance and service life.



Asymmetric pattern with reinforced rib design reduces tread uneven wear.



Longitudinal tread block rib design to improve traction performance.



Steel blade design on the pattern surface improves the ability to break the water film, making it safer to drive in rainy and snowy weather.



**BST58D**



Drive positions for long haul and regional haul on highway, national and provincial roads.



Wear Resistance




Anti-uneven Wear




Good Drainage

**BST58D**


| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 315/70R22.5 | 18PR | 312                              | 1010             | 154/150    | 3750/3350     | 830         |                  | L            | 9.00         | 23               |
| 315/80R22.5 | 20PR | 318                              | 1088             | 157/154    | 4125/3750     | 900         |                  | K            | 9.00         | 23               |



Four-ply belt structure increases the rigidity of the crown part and offers better high-speed driving performance.



Total high-strength steel wire structural materials ensures the load performance and safety performance under ultra-high and heavy loads.



Carbon nanotube rubber material and compound technology are used to improve the performance of longer service life and high wear resistance.





# BST 57D



- For regional application of drive axle
- Applicable to various road surface on freeway
- With good grip and traction performance
- Excellent wear resistance and long mileage

| Size    | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|---------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|         |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11R22.5 | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 20               |
| 11R22.5 | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | L            | 8.25         | 20               |
| 11R22.5 | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | M            | 8.25         | 20               |
| 11R22.5 | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | L            | 8.25         | 20               |
| 11R22.5 | 16PR | 279                              | 1050             | 148/145    | 3150/2900     | 850/850     |                  | M            | 8.25         | 20               |
| 12R22.5 | 14PR | 300                              | 1085             | 146/143    | 3000/2725     | 720/720     |                  | L            | 9.00         | 20               |
| 12R22.5 | 14PR | 300                              | 1085             | 146/143    | 3000/2725     | 720/720     |                  | L            | 9.00         | 20               |

**BESTANG**

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 12R22.5     | 16PR | 300                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | L            | 9.00         | 20               |
| 12R22.5     | 16PR | 300                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | L            | 9.00         | 20               |
| 12R22.5     | 16PR | 300                              | 1084             | 152/148    | 3550/3150     | 850/850     |                  | M            | 9.00         | 20               |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 20               |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 20               |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 20               |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 20               |
| 295/80R22.5 | 16PR | 298                              | 1044             | 150/147    | 3350/3075     | 830/830     |                  | L            | 9.00         | 20.5             |
| 295/80R22.5 | 16PR | 298                              | 1044             | 150/147    | 3350/3075     | 830/830     |                  | L            | 9.00         | 21               |
| 295/80R22.5 | 18PR | 298                              | 1044             | 152/149    | 3550/3250     | 900/900     |                  | M            | 9.00         | 20.5             |
| 295/80R22.5 | 18PR | 298                              | 1044             | 152/149    | 3550/3250     | 900/900     |                  | M            | 9.00         | 21               |
| 315/80R22.5 | 18PR | 312                              | 1076             | 154/151    | 3750/3450     | 830/830     |                  | M            | 9.00         | 21               |
| 315/80R22.5 | 18PR | 312                              | 1076             | 154/151    | 3750/3450     | 830/830     |                  | M            | 9.00         | 21               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 157/154    | 4125/3750     | 900/900     |                  | K            | 9.00         | 21               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 157/154    | 4125/3750     | 900/900     |                  | K            | 9.00         | 21               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850     |                  | L            | 9.00         | 21               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850     |                  | L            | 9.00         | 21               |
| 385/55R22.5 | 18PR | 389                              | 1072             | 158        | 4250          | 830         |                  | L            | 11.75        | 17               |
| 385/55R22.5 | 20PR | 389                              | 1072             | 160        | 4500          | 900         |                  | K            | 11.75        | 17               |



# BST 37D



- Mainly for drive wheels
- Applicable for medium and high speed riding on normal and good roads
- With excellent grip and traction performance

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 235/75R17.5 | 16PR | 233                              | 797              | 132/129    | 2000/1850     | 830/830  | J            | 6.75         | 15.4             |
| 235/75R17.5 | 16PR | 233                              | 797              | 132/130    | 2000/1900     | 775/775  | M            | 6.75         | 15.4             |
| 235/75R17.5 | 18PR | 233                              | 797              | 143/141    | 2725/2575     | 875/875  | J            | 6.75         | 15.4             |
| 245/70R19.5 | 12PR | 248                              | 839              | 129/127    | 1850/1750     | 660/660  | M            | 7.50         | 16               |
| 245/70R19.5 | 14PR | 248                              | 839              | 133/131    | 2060/1950     | 760/760  | M            | 7.50         | 16               |
| 245/70R19.5 | 16PR | 248                              | 839              | 135/133    | 2180/2060     | 830/830  | L            | 7.50         | 16               |
| 245/70R19.5 | 16PR | 248                              | 839              | 136/134    | 2240/2120     | 825/825  | M            | 7.50         | 16               |
| 245/70R19.5 | 18PR | 248                              | 839              | 141/140    | 2575/2500     | 850/850  | J            | 7.50         | 16               |
| 265/70R19.5 | 14PR | 262                              | 867              | 140/138    | 2500/2360     | 850/850  | L            | 7.50         | 15.5             |
| 265/70R19.5 | 14PR | 262                              | 867              | 137/134    | 2300/2120     | 760/760  | L            | 7.50         | 15.5             |
| 265/70R19.5 | 16PR | 262                              | 867              | 139/136    | 2430/2240     | 830/830  | J            | 7.50         | 15.5             |
| 265/70R19.5 | 18PR | 262                              | 867              | 143/141    | 2725/2575     | 850/850  | J            | 7.50         | 15.5             |
| 9.5R17.5    | 18PR | 240                              | 842              | 143/141    | 2725/2575     | 875/875  | K            | 6.75         | 15.5             |

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 215/75R17.5 | 14PR | 211                              | 767              | 125/122    | 1650/1500     | 760/760  | M            | 6.00         | 14.5             |
| 215/75R17.5 | 16PR | 211                              | 767              | 127/124    | 1750/1600     | 830/830  | J            | 6.00         | 14.5             |
| 215/75R17.5 | 14PR | 212                              | 767              | 126/124    | 1700/1600     | 700/700  | M            | 6.00         | 14.5             |
| 215/75R17.5 | 16PR | 212                              | 767              | 135/133    | 2180/2060     | 850/850  | J            | 6.00         | 14.5             |
| 225/70R19.5 | 12PR | 226                              | 811              | 125/123    | 1650/1550     | 660/660  | M            | 6.75         | 15               |
| 225/70R19.5 | 14PR | 226                              | 811              | 128/126    | 1800/1700     | 760/760  | L            | 6.75         | 15               |
| 235/75R17.5 | 12PR | 233                              | 797              | 124/121    | 1600/1450     | 660/660  | M            | 6.75         | 15.4             |
| 235/75R17.5 | 12PR | 233                              | 797              | 126/123    | 1700/1550     | 660/660  | M            | 6.75         | 15.4             |
| 235/75R17.5 | 14PR | 233                              | 797              | 129/126    | 1850/1700     | 760/760  | M            | 6.75         | 15.4             |






# BST 39F



- Mainly for long haul application of steer wheel, also applicable for trailer wheel
- Applicable to ride on high way and good road with speed
- With good performance of water drainage and skid resistance
- Low heating up and low rolling resistance performance



# BST 37F



- All position application
- Applicable to normal and good road
- With good anti-skid and irregular wear resistance
- Four grooves, low rolling resistance

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 295/80R22.5 | 16PR | 298                              | 1044             | 150/147    | 3350/3075     | 830/830     |                  | M            | 9.00         | 15               |
| 295/80R22.5 | 16PR | 298                              | 1044             | 150/147    | 3350/3075     | 830/830     |                  | M            | 9.00         | 15               |
| 295/80R22.5 | 18PR | 298                              | 1044             | 152/149    | 3550/3250     | 900/900     |                  | M            | 9.00         | 15               |
| 295/80R22.5 | 18PR | 298                              | 1044             | 152/149    | 3550/3250     | 900/900     |                  | M            | 9.00         | 15               |
| 295/80R22.5 | 18PR | 298                              | 1044             | 152/149    | 3550/3250     | 900/900     |                  | M            | 9.00         | 15               |
| 315/80R22.5 | 18PR | 312                              | 1076             | 154/151    | 3750/3450     | 830/830     |                  | M            | 9.00         | 15               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 157/154    | 4125/3750     | 900/900     |                  | K            | 9.00         | 15               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850     |                  | L            | 9.00         | 15               |

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 7.50R16LT | 12PR | 215                              | 805              | 120/116    | 1400/1250     | 670/670     |                  | L            | 6.00G        | 11               |
| 7.50R16LT | 14PR | 215                              | 805              | 122/118    | 1500/1320     | 770/770     |                  | L            | 6.00G        | 11               |
| 7.50R16LT | 16PR | 215                              | 805              | 124/120    | 1600/1405     | 800/800     |                  | K            | 6.00G        | 11               |
| 7.50R16LT | 16PR | 215                              | 805              | 124/120    | 1600/1405     | 800/800     |                  | L            | 6.00G        | 11               |
| 8.25R16LT | 14PR | 235                              | 855              | 126/122    | 1700/1500     | 670/670     |                  | L            | 6.50H        | 12               |
| 8.25R16LT | 16PR | 235                              | 855              | 128/124    | 1800/1600     | 770/770     |                  | K            | 6.50H        | 12               |
| 8.25R16LT | 16PR | 235                              | 855              | 128/124    | 1800/1600     | 770/770     |                  | L            | 6.50H        | 12               |



## BST 38F



Steer/trailer positions for long haul and regional haul on highway, national and provincial roads.



Wear Resistance



Anti-uneven Wear



Low Rolling Resistance




High Retreadability

Ultra-wide tread offers large contact patch for longer wear resistance and service life.


Unique groove bottom treatment provides excellent uneven wear resistance and better stone ejection for different wheel positions and road conditions.

New pattern design and optimized material distribution technology achieve low rolling resistance and anti-skid performance.

Ultra-high-strength steel wire structure, special cap design, low heat build-up tread compound and optimized shoulder material prevent uneven wear and ensure multiple retreading of tyres.

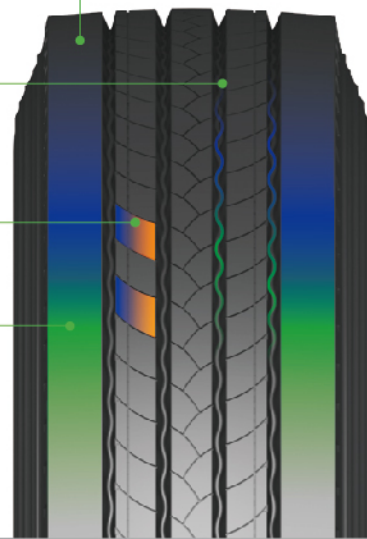


**BESTANG**



Total high-strength steel wire structural materials ensures the load performance and safety performance under ultra-high and heavy loads.



385/65R22.5 adopts 3+0° belt design to achieve ultra-high mileage and limit uneven wear.



315/80R22.5 adopts four-ply belt structure to offer better durability, safety and retreadability.

## BST 38F

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                   | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|-------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kpa) |              |              |                  |
| 315/80R22.5 | 20PR | 316                              | 1075             | 157/154    | 4125/3750     | 900         | 900               | M            | 9.00         | 16               |
| 295/80R22.5 | 18PR | 303                              | 1046             | 152/149    | 3550/3250     | 900         | 900               | M            | 9.00         | 16               |
| 385/65R22.5 | 24PR | 376                              | 1071.5           | 164        | 5000          | 900         | 900               | L            | 11.75        | 16.5             |





# BST 36F



- All position application
- Applicable to normal and good road
- With good anti-skid and irregular wear resistance
- Four grooves, low rolling resistance


**BESTANG**

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 235/75R17.5 | 14PR | 233                              | 797              | 129/126    | 1850/1700     | 760/760  | M            | 6.75         | 13.5             |
| 235/75R17.5 | 16PR | 233                              | 797              | 132/129    | 2000/1850     | 830/830  | J            | 6.75         | 13.5             |
| 235/75R17.5 | 16PR | 233                              | 797              | 143/141    | 2725/2575     | 860/860  | J            | 6.75         | 13.5             |
| 235/75R17.5 | 16PR | 233                              | 797              | 132/130    | 2000/1900     | 775/775  | M            | 6.75         | 13.5             |
| 235/75R17.5 | 18PR | 233                              | 797              | 143/141    | 2725/2575     | 875/875  | J            | 6.75         | 13.5             |
| 245/70R19.5 | 12PR | 248                              | 839              | 129/127    | 1850/1750     | 660/660  | M            | 7.50         | 13.5             |
| 245/70R19.5 | 14PR | 248                              | 839              | 133/131    | 2060/1950     | 760/760  | M            | 7.50         | 13.5             |
| 245/70R19.5 | 16PR | 248                              | 839              | 135/133    | 2180/2060     | 830/830  | L            | 7.50         | 13.5             |
| 245/70R19.5 | 16PR | 248                              | 839              | 136/134    | 2240/2120     | 825/825  | M            | 7.50         | 13.5             |
| 245/70R19.5 | 18PR | 248                              | 839              | 141/140    | 2575/2500     | 850/850  | J            | 7.50         | 13.5             |
| 9.5R17.5    | 18PR | 240                              | 842              | 143/141    | 2725/2575     | 875/875  | M            | 6.75         | 12.5             |

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 215/75R17.5 | 14PR | 211                              | 767              | 125/122    | 1650/1500     | 760/760  | M            | 6.00         | 13               |
| 215/75R17.5 | 16PR | 211                              | 767              | 127/124    | 1750/1600     | 830/830  | J            | 6.00         | 13               |
| 215/75R17.5 | 14PR | 212                              | 767              | 126/124    | 1700/1600     | 700/700  | M            | 6.00         | 13               |
| 215/75R17.5 | 16PR | 212                              | 767              | 135/133    | 2180/2060     | 850/850  | J            | 6.00         | 13               |
| 215/75R17.5 | 16PR | 212                              | 767              | 135/133    | 2180/2060     | 860/860  | J            | 6.00         | 13               |
| 225/70R19.5 | 12PR | 226                              | 811              | 125/123    | 1650/1550     | 660/660  | M            | 6.75         | 13.5             |
| 225/70R19.5 | 14PR | 226                              | 811              | 128/126    | 1800/1700     | 760/760  | M            | 6.75         | 13.5             |
| 235/75R17.5 | 12PR | 233                              | 797              | 124/121    | 1600/1450     | 660/660  | M            | 6.75         | 13.5             |
| 235/75R17.5 | 12PR | 233                              | 797              | 126/123    | 1700/1550     | 660/660  | M            | 6.75         | 13.5             |



# BST 35F



- Mainly for long haul applicationand all position wheels on praved road
- Optimized grooves offer good handing performance
- Optimized stone rejecter sipping help prevent retention of damaging stones

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 6.50R16LT | 12PR | 185                              | 750              | 110/105    | 1060/925      | 670/670     |                  | L            | 5.50F        | 12               |
| 7.00R16LT | 8PR  | 200                              | 775              | 107/102    | 975/850       | 460/460     |                  | L            | 5.50F        | 13               |
| 7.00R16LT | 12PR | 200                              | 775              | 115/110    | 1215/1060     | 670/670     |                  | M            | 5.50F        | 13               |
| 7.00R16LT | 14PR | 200                              | 775              | 118/114    | 1320/1180     | 770/770     |                  | L            | 5.50F        | 13               |



# BST 33F



- Mainly for long haul application of light truck and all position wheels on good road
- For longitudinal grooves design exactly accords with quick movement feature of light truck
- Low heating up compound ensures good wear resistance and fuel saving
- Continuous pattern in shoulder avoids tire irregular wear

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 7.50R16LT | 12PR | 215                              | 805              | 120/116    | 1400/1250     | 670/670     |                  | L            | 6.00G        | 12               |
| 7.50R16LT | 14PR | 215                              | 805              | 122/118    | 1500/1320     | 770/770     |                  | L            | 6.00G        | 12               |
| 7.50R16LT | 16PR | 215                              | 805              | 124/120    | 1600/1405     | 800/800     |                  | K            | 6.00G        | 12               |
| 7.50R16LT | 16PR | 215                              | 805              | 124/120    | 1600/1405     | 800/800     |                  | L            | 6.00G        | 12               |





# BST 34F



- Mainly for rated load and long haul application for all position wheels. Especially for steer and trailer wheels
- Applicable for good road at high speed
- Four straight grooves design offer excellent handing and water drainage performance
- With cross sipe design to generate a good grip and low heating up performance

| Size    | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|---------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|         |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11R22.5 | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 14               |
| 11R22.5 | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 14               |
| 11R22.5 | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | M            | 8.25         | 14               |
| 11R22.5 | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | M            | 8.25         | 14               |
| 11R22.5 | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | L            | 8.25         | 14               |
| 11R24.5 | 14PR | 279                              | 1104             | 146/143    | 3000/2725     | 720/720     |                  | M            | 8.25         | 14               |
| 11R24.5 | 14PR | 279                              | 1104             | 146/143    | 3000/2725     | 720/720     |                  | M            | 8.25         | 14               |

**BESTANG**

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11R24.5     | 16PR | 279                              | 1104             | 149/146    | 3250/3000     | 830/830     |                  | L            | 8.25         | 14               |
| 11R24.5     | 16PR | 279                              | 1104             | 149/146    | 3250/3000     | 830/830     |                  | L            | 8.25         | 14               |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 17.5             |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 17.5             |
| 255/70R22.5 | 14PR | 255                              | 930              | 136/133    | 2240/2060     | 700/700     |                  | M            | 7.50         | 14               |
| 255/70R22.5 | 16PR | 255                              | 930              | 140/137    | 2500/2300     | 800/800     |                  | M            | 7.50         | 14               |
| 255/70R22.5 | 16PR | 255                              | 930              | 140/137    | 2500/2300     | 830/830     |                  | M            | 7.50         | 14               |
| 255/70R22.5 | 16PR | 255                              | 930              | 140/137    | 2500/2300     | 830/830     |                  | M            | 7.50         | 14               |
| 285/75R24.5 | 14PR | 283                              | 1050             | 144/141    | 2800/2575     | 760/760     |                  | M            | 8.25         | 14               |
| 285/75R24.5 | 14PR | 283                              | 1050             | 144/141    | 2800/2575     | 760/760     |                  | M            | 8.25         | 14               |
| 285/75R24.5 | 16PR | 283                              | 1050             | 147/144    | 3075/2800     | 830/830     |                  | L            | 8.25         | 14               |
| 285/75R24.5 | 16PR | 283                              | 1050             | 147/144    | 3075/2800     | 830/830     |                  | L            | 8.25         | 14               |
| 295/75R22.5 | 14PR | 298                              | 1014             | 144/141    | 2800/2575     | 760/760     |                  | M            | 9.00         | 14               |
| 295/75R22.5 | 14PR | 298                              | 1014             | 144/141    | 2800/2575     | 760/760     |                  | M            | 9.00         | 14               |
| 295/75R22.5 | 16PR | 298                              | 1014             | 146/143    | 3000/2725     | 830/830     |                  | L            | 9.00         | 14               |
| 295/75R22.5 | 16PR | 298                              | 1014             | 146/143    | 3000/2725     | 830/830     |                  | L            | 9.00         | 14               |




# BST 31F



- Mainly for steer axle, especially applicable for high way and urban roads
- Applicable for normal and good road surface
- With good stable ability and wear resistance
- Comfortable and fuel saving



# BST 388F



- Maily for long haul of steer and trailer wheels
- Cold-running Tyre
- Applicable to ride on good road and highway

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 275/70R22.5 | 14PR | 276                              | 958              | 142/139    | 2650/2430     | 760/760     |                  | M            | 8.25         | 14.8             |
| 275/70R22.5 | 16PR | 276                              | 958              | 144/141    | 2800/2575     | 830/830     |                  | L            | 8.25         | 14.8             |
| 275/70R22.5 | 16PR | 276                              | 958              | 144/141    | 2800/2575     | 830/830     |                  | M            | 8.25         | 14.8             |
| 275/70R22.5 | 18PR | 276                              | 958              | 146/143    | 3000/2725     | 900/900     |                  | L            | 8.25         | 14.8             |
| 275/70R22.5 | 16PR | 276                              | 958              | 148/145    | 3150/2900     | 900/900     |                  | M            | 8.25         | 14.8             |
| 315/70R22.5 | 16PR | 312                              | 1014             | 149/146    | 3250/3000     | 760/760     |                  | L            | 9.00         | 15               |
| 315/70R22.5 | 18PR | 312                              | 1014             | 151/148    | 3450/3150     | 830/830     |                  | L            | 9.00         | 15               |
| 315/70R22.5 | 16PR | 312                              | 1014             | 152/148    | 3550/3150     | 850/850     |                  | M            | 9.00         | 15               |
| 315/70R22.5 | 18PR | 312                              | 1014             | 154/150    | 3750/3350     | 900/900     |                  | M            | 9.00         | 15               |

| Size    | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|---------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|         |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11R22.5 | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 14.8             |
| 11R22.5 | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | M            | 8.25         | 14.8             |
| 11R22.5 | 16PR | 279                              | 1050             | 148/145    | 3150/2900     | 850/850     |                  | M            | 8.25         | 14.8             |
| 11R24.5 | 14PR | 279                              | 1104             | 146/143    | 3000/2725     | 720/720     |                  | M            | 8.25         | 14.8             |
| 11R24.5 | 16PR | 279                              | 1104             | 149/146    | 3250/3000     | 830/830     |                  | L            | 8.25         | 14.8             |
| 12R22.5 | 14PR | 300                              | 1085             | 146/143    | 3000/2725     | 720/720     |                  | M            | 9.00         | 14.8             |
| 12R22.5 | 16PR | 300                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | L            | 9.00         | 14.8             |
| 12R22.5 |      | 300                              | 1084             | 152/148    | 3550/3150     | 850/850     |                  | M            | 9.00         | 14.8             |
| 12R22.5 | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 14.8             |





# BST 32F



- Long haul application of trailers
- For high speed riding on good roads
- Straight main slots design enhances handling performance and service life
- With high irregular wear resistance technology

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| LT235/85R16 | 12PR | 235                              | 806              | 123/120    | 1550/1400     | 660/660     |                  | M            | 6.50         | 9.5              |
| LT235/85R16 | 14PR | 235                              | 806              | 126/123    | 1700/1550     | 760/760     |                  | M            | 6.50         | 9.5              |
| ST235/85R16 | 14PR | 235                              | 806              | 129/125    | 1850/1650     | 760/760     |                  | L            | 6.50         | 9.5              |
| ST235/85R16 | 14PR | 235                              | 806              | 132/127    | 2000/1750     | 760/760     |                  | L            | 6.50         | 9.5              |
| 275/70R22.5 | 14PR | 276                              | 958              | 142/139    | 2650/2430     | 760/760     |                  | K            | 8.25         | 19.2             |
| 275/70R22.5 | 16PR | 276                              | 958              | 144/141    | 2800/2575     | 830/830     |                  | K            | 8.25         | 19.2             |
| 275/70R22.5 | 18PR | 276                              | 958              | 146/143    | 3000/2725     | 900/900     |                  | J            | 8.25         | 19.2             |

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 275/70R22.5 | 18PR | 276                              | 958              | 148/145    | 3150/2900     | 900/900     |                  | J            | 8.25         | 19.2             |
| 275/70R22.5 | 16PR | 276                              | 958              | 148/145    | 3150/2900     | 900/900     |                  | M            | 8.25         | 19.2             |
| 385/65R22.5 | 18PR | 386                              | 996              | 158        | 4250          | 850         |                  | L            | 12.25        | 15               |
| 385/65R22.5 | 18PR | 386                              | 996              | 158        | 4250          | 830         |                  | L            | 12.25        | 15               |
| 385/65R22.5 | 20PR | 386                              | 996              | 160        | 4500          | 900         |                  | K            | 12.25        | 15               |
| 385/65R22.5 | 18PR | 389                              | 1072             | 158        | 4250          | 830         |                  | L            | 11.75        | 15               |
| 385/65R22.5 | 20PR | 389                              | 1072             | 160        | 4500          | 900         |                  | K            | 11.75        | 15               |
| 385/65R22.5 | 20PR | 389                              | 1072             | 164        | 5000          | 900         |                  | K            | 11.75        | 15               |
| 425/65R22.5 | 18PR | 422                              | 1124             | 162        | 4750          | 760         |                  | L            | 12.25        | 15               |
| 425/65R22.5 | 20PR | 422                              | 1124             | 164        | 5000          | 830         |                  | K            | 12.25        | 15               |
| 425/65R22.5 | 22PR | 422                              | 1124             | 166        | 5300          | 900         |                  | J            | 12.25        | 15               |
| 425/65R22.5 | 20PR | 430                              | 1124             | 165        | 5150          | 825         |                  | K            | 12.25        | 15               |
| 435/50R19.5 | 18PR | 438                              | 931              | 156        | 4000          | 850         |                  | K            | 14.00        | 14               |
| 435/50R19.5 | 20PR | 438                              | 931              | 160        | 4500          | 900         |                  | J            | 14.00        | 14               |
| ST225/90R16 | 14PR | 220                              | 808              | 128/124    | 1800/1600     | 830/830     |                  | K            | 6.00         | 12               |
| ST235/80R16 | 14PR | 235                              | 782              | 128/124    | 1800/1600     | 725/725     |                  | L            | 6.50         | 9.5              |
| 245/70R17.5 | 16PR | 248                              | 789              | 132/130    | 2000/1900     | 830/830     |                  | M            | 7.50         | 13.5             |
| 245/70R17.5 | 18PR | 248                              | 789              | 134/132    | 2120/2000     | 900/900     |                  | L            | 7.50         | 13.5             |





# BST 387F



- For regional application of steer and trailer wheels
- Applicable for riding on normal and city road and high way
- With excellent water drainage and non-skid performance, fuel saving due to low rolling resistance
- The pattern is good in low heating up and high speed performance

| Size     | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|          |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 10.00R20 | 16PR | 278                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | L            | 7.5          | 16               |
| 10.00R20 | 18PR | 278                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | K            | 7.5          | 16               |
| 11.00R20 | 16PR | 293                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | L            | 8.0          | 17               |
| 11.00R20 | 18PR | 293                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | K            | 8.0          | 17               |



Efficient  
Transport

**BESTANG**





# BST 78A



- For all position wheels
- Designed for light truck, agricultural vehicles and light dump truck
- Excellent traction performance
- Low heating up shoulder design

**BESTANG**

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 7.50R16LT   | 16PR | 215                              | 805              | 124/120    | 1600/1405     | 800/800  | K            | 6.00G        | 16               |
| 8.25R16LT   | 14PR | 235                              | 855              | 126/122    | 1700/1500     | 670/670  | L            | 6.50H        | 16               |
| 8.25R16LT   | 16PR | 235                              | 855              | 128/124    | 1800/1600     | 770/770  | K            | 6.50H        | 16               |
| 8.25R20     | 14PR | 236                              | 974              | 136/134    | 2240/2120     | 830/830  | K            | 6.5          | 18               |
| 8.25R20     | 16PR | 236                              | 974              | 139/137    | 2430/2300     | 930/930  | K            | 6.5          | 18               |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930  | L            | 9.00         | 17               |
| 12R22.5     | 18PR | 320                              | 1124             | 156/150    | 4000/3350     | 875/875  | K            | 9.75         | 17               |
| 12R22.5     | 20PR | 320                              | 1124             | 156/153    | 4000/3650     | 930/930  | K            | 9.75         | 17               |
| 315/80R22.5 | 18PR | 312                              | 1076             | 154/151    | 3750/3450     | 830/830  | M            | 9.00         | 15.5             |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850  | L            | 9.00         | 15.5             |

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 6.50R16LT | 10PR | 185                              | 750              | 107/102    | 975/850       | 560/560  | M            | 5.50F        | 12               |
| 6.50R16LT | 12PR | 185                              | 750              | 110/105    | 1060/925      | 670/670  | L            | 5.50F        | 12               |
| 7.00R16LT | 8PR  | 200                              | 775              | 107/102    | 975/850       | 460/460  | L            | 5.50F        | 14               |
| 7.00R16LT | 12PR | 200                              | 775              | 115/110    | 1215/1060     | 670/670  | M            | 5.50F        | 14               |
| 7.00R16LT | 12PR | 200                              | 775              | 115/110    | 1215/1060     | 670/670  | L            | 5.50F        | 14               |
| 7.00R16LT | 14PR | 200                              | 775              | 118/114    | 1320/1180     | 770/770  | L            | 5.50F        | 14               |
| 7.50R16LT | 14PR | 215                              | 805              | 122/118    | 1500/1320     | 770/770  | L            | 6.00G        | 16               |



# BST 77A




- All position application
- Mainly for good road surface
- With good grip and excellent traction performance

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 385/65R22.5 | 18PR | 389                              | 1072             | 158        | 4250          | 830         |                  | L            | 11.75        | 17               |
| 385/65R22.5 | 20PR | 389                              | 1072             | 160        | 4500          | 900         |                  | K            | 11.75        | 17               |
| 385/65R22.5 | 20PR | 389                              | 1072             | 164        | 5000          | 900         |                  | K            | 11.75        | 17               |



# BST 76A



- All position application
- Mainly for good road surface
- With good grip and excellent traction performance

| Size     | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|          |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11.00R20 | 16PR | 293                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | K            | 8.0          | 18               |
| 11.00R20 | 18PR | 293                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | J            | 8.0          | 18               |
| 12R22.5  | 16PR | 300                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | K            | 9.00         | 18               |
| 12R22.5  | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | J            | 9.00         | 18               |





# BST 68A



- All position axls
- For regional application on various road

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 7.50R16LT | 12PR | 215                              | 805              | 120/116    | 1400/1250     | 670/670     |                  | L            | 6.00G        | 12               |
| 7.50R16LT | 14PR | 215                              | 805              | 122/118    | 1500/1320     | 770/770     |                  | L            | 6.00G        | 12               |
| 7.50R16LT | 16PR | 215                              | 805              | 124/120    | 1600/1405     | 800/800     |                  | K            | 6.00G        | 12               |
| 7.50R16LT | 16PR | 215                              | 805              | 124/120    | 1600/1405     | 800/800     |                  | L            | 6.00G        | 12               |
| 8.25R16LT | 14PR | 235                              | 855              | 126/122    | 1700/1500     | 670/670     |                  | L            | 6.50H        | 12               |
| 8.25R16LT | 16PR | 235                              | 855              | 128/124    | 1800/1600     | 770/770     |                  | K            | 6.50H        | 12               |
| 8.25R16LT | 16PR | 235                              | 855              | 128/124    | 1800/1600     | 770/770     |                  | L            | 6.50H        | 12               |
| 7.50R20   | 12PR | 215                              | 935              | 128/126    | 1800/1700     | 760/760     |                  | L            | 6.0          |                  |
| 7.50R20   | 14PR | 215                              | 935              | 130/128    | 1900/1800     | 830/830     |                  | K            | 6.0          |                  |

**BESTANG**

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 8.25R20     | 12PR | 236                              | 974              | 133/131    | 2060/1950     | 720/720     |                  | L            | 6.5          | 13.5             |
| 8.25R20     | 14PR | 236                              | 974              | 136/134    | 2240/2120     | 830/830     |                  | K            | 6.5          | 13.5             |
| 8.25R20     | 16PR | 236                              | 974              | 139/137    | 2430/2300     | 930/930     |                  | K            | 6.5          | 13.5             |
| 9.00R20     | 14PR | 259                              | 1019             | 141/139    | 2575/2430     | 790/790     |                  | L            | 7.0          | 15.5             |
| 9.00R20     | 16PR | 259                              | 1019             | 144/142    | 2800/2650     | 900/900     |                  | K            | 7.0          | 15.5             |
| 10.00R20    | 16PR | 278                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | L            | 7.5          | 16.5             |
| 10.00R20    | 16PR | 278                              | 1054             | 146/142    | 3000/2630     | 840/770     |                  | L            | 7.5          | 16.5             |
| 10.00R20    | 18PR | 278                              | 1054             | 149/146    | 3250/3000     | 930/930     |                  | K            | 7.5          | 16.5             |
| 11.00R20    | 16PR | 293                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | L            | 8.0          | 17               |
| 11.00R20    | 18PR | 293                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | K            | 8.0          | 17               |
| 12.00R20    | 18PR | 315                              | 1125             | 154/151    | 3750/3450     | 830/830     |                  | L            | 8.5          | 15               |
| 12.00R20    | 20PR | 315                              | 1125             | 156/153    | 4000/3650     | 900/900     |                  | K            | 8.5          | 15               |
| 12.00R24    | 18PR | 315                              | 1226             | 158/155    | 4250/3875     | 830/830     |                  | J            | 8.5          | 17               |
| 12.00R24    | 20PR | 315                              | 1226             | 160/157    | 4500/4125     | 900/900     |                  | J            | 8.5          | 17               |
| 12.00R24    | 20PR | 315                              | 1226             | 160/157    | 4500/4125     | 900/900     |                  | K            | 8.5          | 17               |
| 11R22.5     | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 16               |
| 11R22.5     | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | M            | 8.25         | 16               |
| 11R22.5     | 16PR | 279                              | 1050             | 148/145    | 3150/2900     | 850/850     |                  | M            | 8.25         | 16               |
| 12R22.5     | 14PR | 300                              | 1085             | 146/143    | 3000/2725     | 720/720     |                  | L            | 9.00         | 17.5             |
| 12R22.5     | 16PR | 300                              | 1085             | 150/147    | 3350/3075     | 830/830     |                  | L            | 9.00         | 17.5             |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 17.5             |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930     |                  | L            | 9.00         | 17.5             |
| 12R22.5     | 16PR | 320                              | 1124             | 152/149    | 3550/3250     | 760/760     |                  | M            | 9.75         | 17.5             |
| 12R22.5     | 18PR | 320                              | 1124             | 154/151    | 3750/3450     | 830/830     |                  | M            | 9.75         | 17.5             |
| 12R22.5     | 18PR | 320                              | 1124             | 156/150    | 4000/3350     | 875/875     |                  | L            | 9.75         | 17.5             |
| 12R22.5     | 18PR | 320                              | 1124             | 156/150    | 4000/3350     | 875/875     |                  | K            | 9.75         | 17.5             |
| 12R22.5     | 20PR | 320                              | 1124             | 156/153    | 4000/3650     | 930/930     |                  | K            | 9.75         | 17.5             |
| 315/80R22.5 | 18PR | 312                              | 1076             | 154/151    | 3750/3450     | 830/830     |                  | M            | 9.00         | 15               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 157/154    | 4125/3750     | 900/900     |                  | K            | 9.00         | 15               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850     |                  | L            | 9.00         | 15               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850     |                  | M            | 9.00         | 15               |



# BST 66A



- TT/TL Dual mode
- Excellent anti-overloading and excellent wear resistance
- Wide tread and Complex groove angle to improve the irregular wear and long tread life

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 325/95R24 | 22PR | 325                              | 1228             | 162/160    | 4750/4500     | 850/850     |                  | K            | 9.0          | 17.5             |



# BST 67A



- Excellent anti-overloading and excellent wear resistance
- Wide tread and Complex groove angle to improve the irregular wear and long tread life

| Size      | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-----------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|           |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 325/95R24 | 22PR | 325                              | 1228             | 162/160    | 4750/4500     | 850/850     |                  | K            | 9.0          | 17               |
| 325/95R24 | 20PR | 325                              | 1228             | 164/162    | 5000/4750     | 900/900     |                  | G            | 9.0          | 17               |





# BST 65A



- All position
- Applicable for regional and long haul on paved road

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 295/60R22.5 | 14PR | 292                              | 926              | 146/143    | 3000/2725     | 760/760  | L            | 9.00         | 14.8             |
| 295/60R22.5 | 16PR | 292                              | 926              | 148/145    | 3150/2900     | 830/830  | L            | 9.00         | 14.8             |
| 295/60R22.5 | 16PR | 292                              | 926              | 149/146    | 3250/3000     | 900/900  | L            | 9.00         | 14.8             |
| 295/60R22.5 | 18PR | 292                              | 926              | 150/147    | 3350/3075     | 900/900  | K            | 9.00         | 14.8             |
| 295/80R22.5 | 16PR | 298                              | 1044             | 150/147    | 3350/3075     | 830/830  | L            | 9.00         | 14.8             |
| 295/80R22.5 | 18PR | 298                              | 1044             | 152/149    | 3550/3250     | 900/900  | M            | 9.00         | 14.8             |
| 315/60R22.5 | 18PR | 313                              | 950              | 151/148    | 3450/3150     | 830/830  | L            | 9.75         | 14.8             |
| 315/60R22.5 | 16PR | 313                              | 950              | 152/148    | 3550/3150     | 900/900  | L            | 9.75         | 14.8             |
| 315/80R22.5 | 18PR | 312                              | 1076             | 154/151    | 3750/3450     | 830/830  | M            | 9.00         | 15.5             |
| 315/80R22.5 | 20PR | 312                              | 1076             | 157/154    | 4125/3750     | 900/900  | K            | 9.00         | 15.5             |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850  | L            | 9.00         | 15.5             |

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 11R22.5     | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720  | M            | 8.25         | 14.8             |
| 11R22.5     | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830  | M            | 8.25         | 14.8             |
| 12R22.5     | 14PR | 300                              | 1085             | 146/143    | 3000/2725     | 720/720  | M            | 9.00         | 14.8             |
| 12R22.5     | 16PR | 300                              | 1085             | 150/147    | 3350/3075     | 830/830  | L            | 9.00         | 14.8             |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930  | L            | 9.00         | 14.8             |
| 275/80R22.5 | 14PR | 276                              | 1012             | 145/143    | 2900/2725     | 750/750  | L            | 8.25         | 15               |
| 275/80R22.5 | 16PR | 276                              | 1012             | 149/146    | 3250/3000     | 850/850  | L            | 8.25         | 15               |



# BST 64A



- For long haul application of truck and all positions wheels on good roads
- With wide tread design to extend tire service life
- With excellent water drainage and heat dispersion performance
- This pattern has performance in low heating up and rolling resistance

**BESTANG**

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 12R22.5     | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930  | L            | 9.00         | 18               |
| 295/80R22.5 | 16PR | 298                              | 1044             | 150/147    | 3350/3075     | 830/830  | L            | 9.00         | 18               |
| 295/80R22.5 | 18PR | 298                              | 1044             | 152/149    | 3550/3250     | 900/900  | M            | 9.00         | 18               |
| 315/80R22.5 | 18PR | 312                              | 1076             | 154/151    | 3750/3450     | 830/830  | M            | 9.00         | 18               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 157/154    | 4125/3750     | 900/900  | K            | 9.00         | 18               |
| 315/80R22.5 | 20PR | 312                              | 1076             | 156/150    | 4000/3350     | 850/850  | L            | 9.00         | 18               |

| Size     | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|----------|------|----------------------------------|------------------|------------|---------------|----------|--------------|--------------|------------------|
|          |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               |          |              |              |                  |
| 11.00R20 | 16PR | 293                              | 1085             | 150/147    | 3350/3075     | 830/830  | L            | 8.0          | 17               |
| 11.00R20 | 18PR | 293                              | 1085             | 152/149    | 3550/3250     | 930/930  | K            | 8.0          | 17               |
| 11R22.5  | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720  | L            | 8.25         | 17.5             |
| 11R22.5  | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830  | L            | 8.25         | 17.5             |
| 12R22.5  | 14PR | 300                              | 1085             | 146/143    | 3000/2725     | 720/720  | L            | 9.00         | 18               |
| 12R22.5  | 16PR | 300                              | 1085             | 150/147    | 3350/3075     | 830/830  | L            | 9.00         | 18               |
| 12R22.5  | 18PR | 300                              | 1085             | 152/149    | 3550/3250     | 930/930  | L            | 9.00         | 18               |





# BST 63A




- All position
- Excellent high speed performance and good grip both on dry and wet road
- Good wear resistance and fuel saving
- Continuous pattern in the shoulder avoids tire irregular wear

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 10R22.5     | 14PR | 254                              | 1019             | 141/139    | 2575/2430     | 790/790     |                  | M            | 7.50         | 14.5             |
| 10R22.5     | 16PR | 254                              | 1019             | 144/142    | 2800/2650     | 900/900     |                  | L            | 7.50         | 14.5             |
| 265/70R19.5 | 14PR | 262                              | 867              | 140/138    | 2500/2360     | 850/850     |                  | L            | 7.50         | 13.5             |
| 265/70R19.5 | 14PR | 262                              | 867              | 137/134    | 2300/2120     | 760/760     |                  | L            | 7.50         | 13.5             |
| 265/70R19.5 | 16PR | 262                              | 867              | 139/136    | 2430/2240     | 830/830     |                  | J            | 7.50         | 13.5             |
| 265/70R19.5 | 18PR | 262                              | 867              | 143/141    | 2725/2575     | 850/850     |                  | J            | 7.50         | 13.5             |

**BESTANG**



# BST 62A



- For all position wheels
- Applicable for regional and long haul on paved road
- With excellent grip and traction ,anti-skidding performance  
low noise; better fuel efficiency

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 385/65R22.5 | 20PR | 389                              | 1072             | 164        | 5000          | 900         |                  | K            | 11.75        | 17               |



# BST 38T



- Mainly for trailer wheel
- Fuel saving for low rolling resistance
- Long mileage and low cost per mile



# BST 37T



- Good loading capacity, low rolling resistance and low noise
- With excellent water drainage and skip performance
- Mainly for trailer wheel, also applicable for steer wheel
- Applicable for medium and high speed transportation on good roads

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11R22.5     | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 10               |
| 11R22.5     | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 830/830     |                  | M            | 8.25         | 10               |
| 11R24.5     | 14PR | 279                              | 1104             | 146/143    | 3000/2725     | 720/720     |                  | M            | 8.25         | 10               |
| 11R24.5     | 16PR | 279                              | 1104             | 149/146    | 3250/3000     | 830/830     |                  | L            | 8.25         | 10               |
| 255/70R22.5 | 14PR | 255                              | 930              | 136/133    | 2240/2060     | 700/700     |                  | M            | 7.50         | 10               |
| 255/70R22.5 | 16PR | 255                              | 930              | 140/137    | 2500/2300     | 800/800     |                  | M            | 7.50         | 10               |
| 255/70R22.5 | 16PR | 255                              | 930              | 140/137    | 2500/2300     | 830/830     |                  | M            | 7.50         | 10               |
| 285/75R24.5 | 14PR | 283                              | 1050             | 144/141    | 2800/2575     | 760/760     |                  | M            | 8.25         | 10               |
| 285/75R24.5 | 16PR | 283                              | 1050             | 147/144    | 3075/2800     | 830/830     |                  | L            | 8.25         | 10               |
| 295/75R22.5 | 14PR | 298                              | 1014             | 144/141    | 2800/2575     | 760/760     |                  | M            | 9.00         | 10               |
| 295/75R22.5 | 16PR | 298                              | 1014             | 146/143    | 3000/2725     | 830/830     |                  | L            | 9.00         | 10               |

| Size        | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|-------------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|             |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 385/55R22.5 | 18PR | 389                              | 1072             | 158        | 4250          |             | 830              | L            | 11.75        | 15               |
| 385/55R22.5 | 20PR | 389                              | 1072             | 160        | 4500          |             | 900              | K            | 11.75        | 15               |





# BST 18A



- Aggressive, open-shoulder design helps deliver long tread life and traction
- Extensive lug and siping to improve traction on wet and dry surfaces, and the extra-wide tread helps deliver added stability. Especially in deep snow

| Size    | PR   | NEW TYRE INFLATED DIMENSIONS(mm) |                  | LOAD INDEX | MAX.LOAD (kg) | PRESSURE    |                  | SPEED RATING | STANDARD RIM | TREAD DEPTH (mm) |
|---------|------|----------------------------------|------------------|------------|---------------|-------------|------------------|--------------|--------------|------------------|
|         |      | SECTION WIDTH                    | OVERALL DIAMETER |            |               | SINGLE/DUAL | SINGLE/DUAL (kg) |              |              |                  |
| 11R22.5 | 14PR | 279                              | 1054             | 144/142    | 2800/2650     | 720/720     |                  | M            | 8.25         | 21               |
| 11R22.5 | 16PR | 279                              | 1054             | 146/143    | 3000/2725     | 825/825     |                  | L            | 8.25         | 21               |
| 11R24.5 | 14PR | 279                              | 1104             | 146/143    | 3000/2725     | 720/720     |                  | M            | 8.25         | 21               |
| 11R24.5 | 16PR | 279                              | 1104             | 149/146    | 3250/3000     | 825/825     |                  | L            | 8.25         | 21               |

## Ply Ratings & Load Index

| PR         | 2PR | 4PR | 6PR | 8PR | 10PR | 12PR | 14PR | 16PR | 18PR | 20PR | 22PR | 24PR |
|------------|-----|-----|-----|-----|------|------|------|------|------|------|------|------|
| Load class | A   | B   | C   | D   | E    | F    | G    | H    | J    | L    | M    | N    |

## Speed Rating

| Speed Symbol | A1  | A2  | A3  | A4  | A5  | A6  | A7  | A8  | B   | C   | D   | E   | F   | G   | J   |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|              | 5   | 10  | 15  | 20  | 25  | 30  | 35  | 40  | 50  | 60  | 65  | 70  | 80  | 90  | 100 |
| Speed km/h   | K   | L   | M   | N   | P   | Q   | R   | S   | T   | U   | H   | V   | W   | Y   |     |
|              | 110 | 120 | 130 | 140 | 150 | 160 | 170 | 180 | 190 | 200 | 210 | 240 | 270 | 300 |     |

## NOTES

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

## NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.